
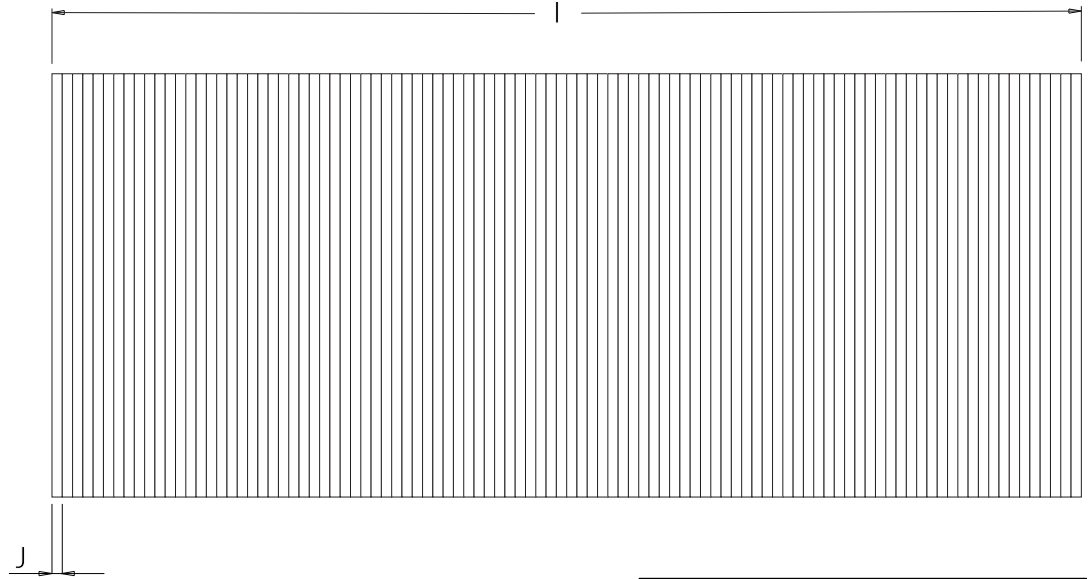


POWERNAIL®

POWERCLEATS®

16 GA.

HARDWOOD FLOORING L-CLEAT

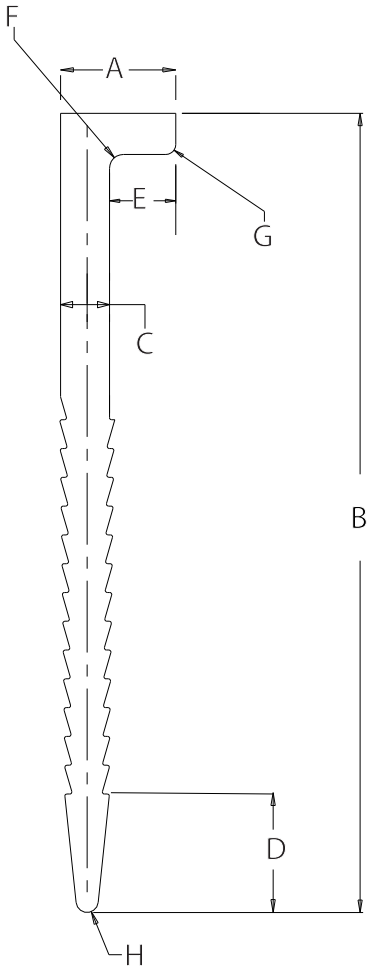

Material Options	
1010 CRS Steel	
304 Stainless Steel	
316 Stainless Steel	

Recycled Steel



2"

	Description	(inches)
A	Head Length	.28
B	Cleat Length	1.94
C	Neck Thickness	.12
D	Tip Length	.29
E	Inner Head Length	.16
F	Inner Head Radius	.03
G	Outer Head Radius	.02
H	Cleat Tip Radius	.03
I	Strip Length (100 cleats)	6.19
J	Cleat Width	.062

1-3/4"

	Description	(inches)
A	Head Length	.28
B	Cleat Length	1.70
C	Neck Thickness	.12
D	Tip Length	.29
E	Inner Head Length	.16
F	Inner Head Radius	.03
G	Outer Head Radius	.02
H	Cleat Tip Radius	.03
I	Strip Length (100 cleats)	6.19
J	Cleat Width	.062

1-1/2"

	Description	(inches)
A	Head Length	.28
B	Cleat Length	1.46
C	Neck Thickness	.12
D	Tip Length	.29
E	Inner Head Length	.16
F	Inner Head Radius	.03
G	Outer Head Radius	.02
H	Cleat Tip Radius	.03
I	Strip Length (100 cleats)	6.19
J	Cleat Width	.062

POWERNAIL®

www.powernail.com